



# 2024 CATALOGUE



**DOWNLIGHTS**  
Slim Color Changeable  
Dimmable LED Downlight



**SECURITY LIGHT**  
Remote Control High Lumen  
Output Security Light



**CABINET LIGHTS**  
Color Changeable LED  
Reading Light



**SMART DOWNLIGHTS**  
Smart LED Downlight with  
Interchangeable Beams



**SOLAR LIGHT**  
LED Solar Spike Light



**SMART SECURITY**  
High Lumen Output Outdoor  
Smart Security Light



Factory Add: No.255 Yindong South Rd., Yinzhou Economic Development Zone,  
Zhanqi Town, Ningbo City, Zhejiang, China.

Email: [sales@silanglighting.com](mailto:sales@silanglighting.com)

Website: [www.silanglighting.com](http://www.silanglighting.com)

Tel: (+86)-574-55003160

## Europe & Australia

SILANGLIGHTING

# COMPANY PROFILE



**20000**<sup>m<sup>2</sup></sup>  
Plant area

**200+**  
Workers

**30 +**  
Export country

**\$30** million  
Annual output

As a rising star of LED lighting industry, Ningbo SILANG Lighting is specialized in designing, manufacturing and developing LED lights. With years of lighting experience, we are dedicated to helping with the upgrading of indoor/outdoor lighting environment through our high-quality led downlights, security floodlights, smart lights and solar lights.

The company is located in Ningbo city, which is only a 30-minute drive from Ningbo Port. SILANG possesses strong advantages of both fast delivery and strong supply chain system.

SILANG's easy-to-use, innovative and reliable products are highly preferred by our loyal clients in Europe, Australia, New Zealand and now US markets. We offer a wide range of products and services, as well as multiple solutions to support the market growth you want.

SILANG embraces technical innovation and revolution. We believes that research and development investment is the key to brings new and innovative products to market with customer involvement.

Whatever your professional lighting needs, we'd love to help you with your current/next project.





# CERTIFICATION



# OUR STRENGTH

- 
**Professional Lights with Competitive Price:** Well-designed products are developed and manufactured by our own lab and factory, together with our optimal self-made drivers. Our state-of-the-art equipment allows us to always provide quality LED lighting solutions with a reasonable price and flexible ordering quantities.
- 
**Rigorous Quality Control:** Focus on LED lighting for 10 years, the whole manufacturing process strictly follows the ISO9001 Quality Management System, meeting RCM, CE and ETL criteria. The QC department conducts IQC, inspection during the assembling, random inspection and even full inspection on request before shipping.
- 
**Stable Delivery Time:** Having 200+ skilled workers and 22 assembly lines, we've reached a product capacity of 600,000pcs per month, ensuring a fast delivery time. Meanwhile, locating in the port city, Ningbo, also means a great convenience for exportation.
- 
**Strong R&D Capability:** SILANG embraces technical innovation and revolution. Thanks to our experienced and talented team members, SILANG's independent R&D department maintains a consistent pace of releasing 6+ new products each year. Besides, we offer deep customization service by requests from Australian, European and American markets.

# FACILITY

Downlight



Security Light




Coming Soon...



EU  
AU

**Code** DL-SP25G-106D3  
**Wattage** 6W  
**CCT(K)** 3000K/4000K/6500K  
**Lumens** 520lm  
**Beam Angle** 60°/120°  
**Dimmable** Yes  
**Material** PA+AL+PC  
**Height** 25mm



**25mm Ultra Slim Design**  
 Meet various space requirements



**Changeable Beam Angle**  
 Change 60° to 120° with diffusion sheet



**Separated LED Module**  
 Easy to replace



**SP series** White Black Nickel

*Slim Fixed/Tilt Led Downlight*

SP Series						
<b>Code</b>	DL-SP25F-106D3	DL-SP25G-106D3	DL-SP25B-F-106D3	DL-SP25B-G-106D3	DL-SP225F-106D5	DL-SP225G-106D5
<b>Wattage</b>	6W	6W	6W	6W	5.5W	5.5W
<b>Lumens</b>	520lm	520lm	495lm	495lm	480lm	480lm
<b>Tilt Angle</b>	/	30°	/	30°	/	30°
<b>Cutout</b>	68-75mm	75-78mm	68-75mm	75-78mm	68-75mm	75-78mm



**Code** DL-SP25G-106D3  
**Wattage** 6W  
**CCT(K)** 3000K/4000K/6500K  
**Lumens** 520lm  
**Beam Angle** 60°  
**Dimmable** Yes  
**Material** PA+Al+PC  
**Height** 25mm




**Ultra-Flat Design**

Aesthetically pleasing & easy to install



**Variable Beam Angle**

From 60° to 120° with diffusion sheet



**GU10/MR16 Replacement**

Φ50mm, ideal replacements for traditional bulbs



# SP series

White

3CCT Separated LED Module

**Compatible with Multiple Frames**



**Code** DL-SH230AG-108D3  
**Wattage** 8W  
**CCT(K)** 3000K/4000K/5700K  
**Lumens** 800lm  
**Beam Angle** 60°  
**Dimmable** Yes(Triac)  
**Material** Nylon+Al+PC  
**Height** 55mm



**Anti-Glare Design**

Eye protection



**External Driver**

Longer service life & more durable



**Interchangeable Bezels**

Wild applications



# SH2 series

White Black Nickel Chrome

Anti-Glare 3CCT Selectable LED Downlight

SHII Series	SH225-108D3		SH230-110D3		SH225-108D5		SH230-110D5	
	SH225-108D3	SH230-110D3	DL-SH230AG-108D3	DL-SH230SAG-108D3	SH225-108D5	SH230-110D5	SH225-108D5	SH230-110D5
<b>Code</b>	SH225-108D3	SH230-110D3	DL-SH230AG-108D3	DL-SH230SAG-108D3	SH225-108D5	SH230-110D5	SH225-108D5	SH230-110D5
<b>Wattage</b>	8W	10W	8W	8W	8W	10W	8W	10W
<b>Lumens</b>	640lm	900lm	800lm	800lm	600lm	750lm	600lm	750lm
<b>Beam Angle</b>	110°		60°	60°	110°			
<b>Cutout</b>	70-80mm	90-100mm	90-100mm	90-100mm	70-80mm	90-100mm	70-80mm	90-100mm
<b>Height</b>	34mm		35mm	55mm	34mm			





DOWNLIGHT



DOWNLIGHT

Code DL-SH330SAG-110D3  
 Wattage 10W  
 CCT(K) 3000K/4000K/5700K  
 Lumens 850lm  
 Beam Angle 60°  
 Dimmable Yes(Triac)  
 Material Nylon+Al+PC  
 Height 71mm




**Anti-Glare Design**

Eye protection



**Light Source Selectable**

SMD/COB light source available



**Interchangeable Bezels**

Wide applications



# SH3 series



Deep Recessed 3CCT Selectable LED Downlight

Code DL-SF30-108D3  
 Wattage 8W  
 CCT(K) 3000K/4000K/5700K  
 Lumens 800lm  
 Beam Angle 110°  
 Dimmable Yes(Triac)  
 Material PA+PC  
 Height 32.4mm



**32mm Slim Design**

Save ceiling space



**Upgraded DOB Plan**

Choice of cost-effective



**Energy Efficiency**

Saving energy without brightness compromise



# SF series



Color Adjustable Dimmable Slim LED Downlight

SHIII Series		Upgrade	Upgrade	
Code	DL-SH330(C)-110D3	DL-SH330AG-110D3	DL-SH330SAG-110D3	DL-SH330-110D5
Wattage	10W	10W	10W	10W
Lumens	850lm	850lm	850lm	750lm
Beam Angle	110°	60°	60°	110°
Cutout	90-100mm	90-100mm	90-100mm	90-100mm
Height	50mm	50mm	71mm	50mm



SF Series				New
Code	DL-SF25-106D3	DL-SF30-108D3	DL-SF30B-108D3	DL-SF40-112D3
Wattage	6W	8W	8W	12W
Lumens	600lm	800lm	720lm	1100lm
Beam Angle	110°	110°	110°	110°
Cutout	75-80mm	90-100mm	90-100mm	90-100mm
Height	32mm	32.4mm	40mm	32.4mm



**Code** DL-SQ325R-108LND3  
**Wattage** 4W/6W/8W  
**CCT(K)** 3000K/4000K/6500K  
**Lumens** 400/600/800lm  
**Beam Angle** 110°  
**Dimmable** Yes(Triac)  
**Material** PP+AI+PC  
**Height** 29mm



3WT



**3 Wattage Turnable**

Switch the brightness you need



**Super Thin Design**

Suitable for slim ceiling void



**Multi-Shape Selectable**

Round & square face available



**SQ series** White Black Nickel Chrome

Slim Colour Changeable Dimmable LED Downlight

SQ Series	 <small>New</small>		
<b>Code</b>	DL-SQ325R-108LND3	DL-SQ25R-107LND3	DL-SQ25S-107LND3
<b>Wattage</b>	4W/6W/8W	7W	7W
<b>Lumens</b>	400/600/800lm	560lm	560lm
<b>Beam Angle</b>	110°	110°	110°
<b>Cutout</b>	68-78mm	66-75mm	66-75mm



**Code** DL-SS20-104LND3  
**Wattage** 4W  
**CCT(K)** 3000K/4000K/6500K  
**Lumens** 320lm  
**Beam Angle** 110°  
**Dimmable** Yes(Triac)  
**Material** PP+PS  
**Height** 30mm



**Super Thin Design**

Suitable for Slim ceiling void



**Multi-Size Selectable**

From 2" to 8", 7 sizes available



**Upgraded DOB Plan**

Choice of cost-effective



**SS series** White Black Nickel

Ultra Slim Colour Changeable LED Downlight


SS Series		 <small>New</small>					
<b>Code</b>	DL-SS20-104LND3	DL-SS23-105LND3	SL-SS25-105LND3	DL-SS30-107LND3	DL-SS40-110LND3	DL-SS60-115LND3	DL-SS80-122LND3
<b>Wattage</b>	4W	5W	5W	7W	10W	15W	22W
<b>Lumens</b>	320lm	400lm	400lm	600lm	850lm	1300lm	1900lm
<b>Beam Angle</b>	110°	110°	110°	110°	110°	110°	110°
<b>Cutout</b>	55-68mm	68-78mm	75-85mm	90-100mm	125-135mm	145-165mm	185-210mm
<b>Height</b>	30mm	29mm	31mm	31mm	31mm	32mm	32mm



## SS | 3CCT Low Voltage Slim LED Downlight

### SPECIFICATIONS

Code	DL-SS20N-504N3
Wattage	4W
CCT(K)	3000K/4000K/6500K
Lumens	400lm max
Input	12VAC
Beam Angle	120°
Dimmable	No
Cutout	55-68mm
Height	30mm
Material	PP+PS

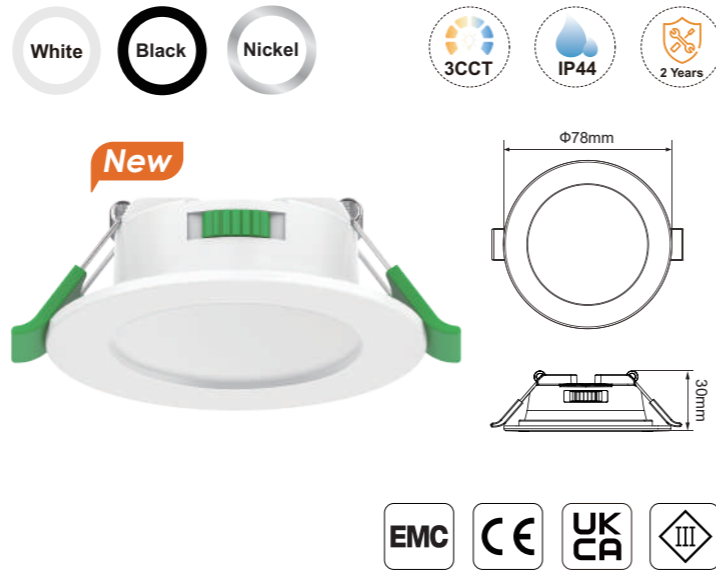

## ST | 3CCT Low Voltage Ultra Slim LED Downlight

### SPECIFICATIONS

Code	DL-ST20V-504N3
Wattage	3.5W
CCT(K)	3000K/4000K/6000K
Lumens	250lm
Input	AC 12V, DC 12-24V
Beam Angle	120°
Dimmable	No
Cutout	55-58mm
Height	18mm
Material	PC



## SE | 6W 70mm Cutout IP54 Smart LED Downlight

### SPECIFICATIONS

Code	DL-SE25-106D5	Beam Angle	110°
Wattage	6W	Dimmable	Yes
CCT(K)	3000K-6500K&RGB	Material	Nylon+Aluminum+PC
Lumens	570lm	Height	33mm



## SA | Colour Changeable IP44 Dimmable LED Downlight

### SPECIFICATIONS

Code	DL-SA330-110D3	Beam Angle	110°
Wattage	10W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K	Material	Nylon+Aluminum+PC
Lumens	900lm	Height	56mm



## YF | Colour Switchable LED Downlight With Isolated Dimmable Driver

### SPECIFICATIONS

Code	YB25-109D3	YF30-112D3	YB40-115D3	Beam Angle	110°
Wattage	9W	12W	15W	Dimmable	Yes
CCT(K)	3000K/4000K/5700K			Material	Aluminum+PC
Lumens	800lm	1100lm	1350lm	Height	40mm 40mm 45mm





## SI | Colour Changeable LED Downlight Four Dimensions Available

### SPECIFICATIONS

<b>Code</b>	SI225	SI230	SI235	SI240	<b>Beam Angle</b>	110°
<b>Wattage</b>	8W	10W	12W	14W	<b>Dimmable</b>	Yes
<b>CCT(K)</b>	3000K/4000K/5700K				<b>Material</b>	Nylon+Aluminum+PC
<b>Lumens</b>	750lm	900lm	1100lm	1300lm	<b>Height</b>	50mm 57mm 60mm 65mm



## SI | PIR Motion Sensor Colour Changeable LED Downlight

### SPECIFICATIONS

<b>Code</b>	DL-SI230-110P3	<b>Detection Range</b>	120°
<b>Wattage</b>	10W	<b>Detection Distance</b>	5m max
<b>CCT(K)</b>	3000K/4000K/5700K	<b>Detection Duration</b>	1hr max
<b>Lumens</b>	800lm	<b>Working Ambience</b>	<50Lux
<b>Beam Angle</b>	110°	<b>Height</b>	65mm



## SO | Anti-Glare Tilttable Colour Changeable LED Downlight

### SPECIFICATIONS

<b>Code</b>	DL-SO30T-109D3	<b>Beam Angle</b>	60°
<b>Wattage</b>	9W	<b>Dimmable</b>	Yes
<b>CCT(K)</b>	3000K/4000K/5700K	<b>Material</b>	Nylon+Aluminum+PC
<b>Lumens</b>	720lm	<b>Height</b>	33mm



## SO | Tilttable Colour Changeable LED Downlight With Dimmable Driver

### SPECIFICATIONS

<b>Code</b>	DL-SO30T-S109D3	<b>Beam Angle</b>	110°
<b>Wattage</b>	9W	<b>Dimmable</b>	Yes
<b>CCT(K)</b>	3000K/4000K/5700K	<b>Material</b>	Nylon+Aluminum+PC
<b>Lumens</b>	720lm	<b>Height</b>	33mm



<b>Code</b>	WL-YD3R-130P
<b>Wattage</b>	30W
<b>CCT(K)</b>	3000K/4000K/6500K
<b>Lumens</b>	2400lm
<b>Beam Angle</b>	90°/head
<b>Detection Angle</b>	120°
<b>Detection Distance</b>	10m max
<b>Material</b>	PC+AL



## New YD3R series White Black

Single/Double Headed 3CCT LED Security Light

**Sensitive Motion Sensor**  
120° sensing angle, 10m max sensing range



**Multiple Working Modes**

AUTO/ON TIME modes available



**Adjustable Heads**

Wide illuminating area



YD3R series				
<b>Code</b>	WL-YD3R-130P	WL-YD3R-130	WL-YD3R-115P	WL-YD3R-115
<b>Wattage</b>	30W	30W	15W	15W
<b>Lumens</b>	2400W	2400W	1200W	1200W
<b>Working Mode</b>	Auto/On Time	On Time	Auto/On Time	On Time
<b>Detection Range</b>	120°/12m max	/	120°/12m max	/



**Code** WL-YDR-124P(BK)  
**Wattage** 24W  
**CCT(K)** 3000K/4000K/6500K  
**Lumens** 1900lm  
**Beam Angle** 90°/head  
**Detection Angle** 120°  
**Detection Distance** 10m max  
**Material** PC



**Sensitive Motion Sensor**  
 120° sensing angle, 10m max sensing range



**Multiple Working Modes**  
 AUTO/D2D/ON TIME modes available



**Optional Control Methods**  
 Remote/App control available



## YDR(S) series

Colour Changing LED Security Light

YDR(S) Series						
<b>Code</b>	WL-YDR-124P	WL-YDR-124P-D4	WL-YDR-124P-D5	WL-YDS-130P	WL-YDS-130P-D4	WL-YDS-130P-D5
<b>Wattage</b>	24W			30W		
<b>Lumens</b>	1900lm(BK)/2500lm(WH)			2400lm(BK)/2850lm(WH)		
<b>Working Mode</b>	Auto On Time	Auto D2D On Time	Auto On Time	Auto On Time	Auto D2D On Time	Auto On Time



## YC2R | Colour Changing LED Security Light

### SPECIFICATIONS

**Code** YC2R-030P  
**Wattage** 30W  
**CCT(K)** 3000K/4000K/6000K  
**Lumens** 2400lm  
**Beam Angle** 90°/head  
**Detection Angle** 160°  
**Detection Brightness** 5-2000Lux  
**Duration Time** 7secs-10mins  
**Detection Distance** 12m max  
**Manual Override** Yes  
**Material** Die-cast AL+PC+Glass



## YB2R | PIR Motion Sensor Twin LED Security Light

### SPECIFICATIONS

**Code** YB2R-020P  
**Wattage** 20W  
**CCT(K)** 3000K/4000K/6000K Optional  
**Lumens** 1400lm  
**Beam Angle** 90°/head  
**Detection Angle** 160°  
**Detection Brightness** 5-2000Lux  
**Duration Time** 7secs-10mins  
**Detection Distance** 12m max  
**Manual Override** Yes  
**Material** Die-cast AL+PC+Glass



## YA2R | PIR Motion Sensor Twin LED Security Light

### SPECIFICATIONS


**Code** YA2R-030P  
**Wattage** 30W  
**CCT(K)** 3000K/4000K/6000K Optional  
**Lumens** 2700lm  
**Beam Angle** 90°/head  
**Detection Angle** 160°  
**Detection Brightness** 5-2000Lux  
**Duration Time** 7secs-10mins  
**Detection Distance** 12m max  
**Manual Override** Yes  
**Material** Die-cast AL+PC+Glass



## FLB | IP65 LED Flood Light with PIR Sensor

### SPECIFICATIONS


**Code** FLB-115P3 FLB-130P3 FLB-150P3  
**Wattage** 15W 30W 50W  
**CCT(K)** 3000K-6500K  
**Lumens** 1200lm 2400lm 4000lm  
**Beam Angle** 100°  
**Detection Angle** 120°  
**Detection Brightness** 5-2000Lux  
**Duration Time** 3secs-8mins  
**Detection Distance** 10m max  
**Material** Nylon/AL+Glass



## FLB | IP65 Remote Control LED Flood Light

### SPECIFICATIONS

**Code** FLB-115D4 FLB-130D4 FLB-150D4  
**Wattage** 15W 30W 50W  
**CCT(K)** 3000K-6500K  
**Lumens** 1200lm 2400lm 4000lm  
**Beam Angle** 100°  
**Detection Angle** 120°  
**Detection Brightness** 5-2000Lux  
**Duration Time** 3secs-8mins  
**Detection Distance** 10m max  
**Material** Nylon/AL+Glass



## FLB | Smart LED Flood Light

### SPECIFICATIONS

**Code** FLB-115D5 FLB-130D5 FLB-150D5  
**Wattage** 15W 30W 50W  
**CCT(K)** 3000K-6500K&RGB  
**Lumens** 1200lm 2400lm 4000lm  
**Beam Angle** 100°  
**Dimmable** Yes  
**Material** Nylon/AL+Glass



Coming Soon...




## YH Die-Cast AL Series

Upgraded heat dissipation ★  
Longer service life & more durable ★

## SF SAG Series


★ Upgraded anti-glare design  
★ Soft light creates cozier ambience

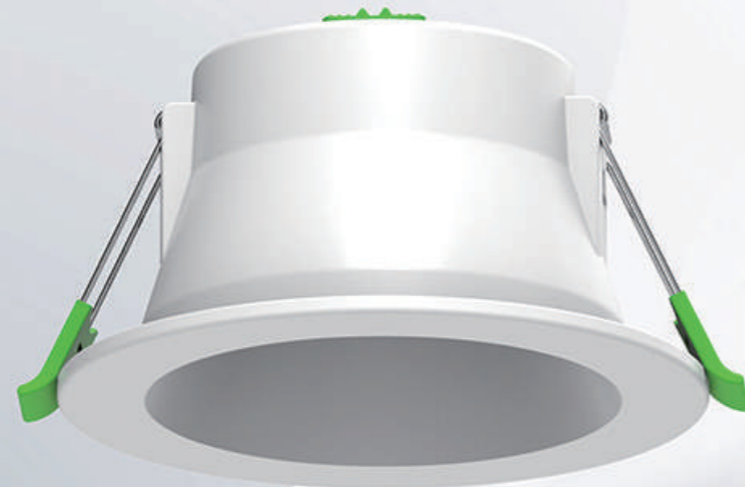

## Battery Light



UB01



UB05



UB06R



UB02



UB03



UB04

## Solar Light



OT-01A



OT-01B



OT-04



OT-05

## Coming Soon...



UB02 Beginner Serie



SV25S



Outdoor Light NEO Series

# GLOBAL



BATTERY LIGHT



BATTERY LIGHT

Code UB01  
 Wattage 3W  
 CCT(K) 3000K/4000K/5000K/6000K+RGB  
 Lumens 200lm  
 Beam Angle 24°  
 Dimmable Yes(Triac)  
 Material ABS  
 Battery 3.7V 4000mAh  
 USB Charging Type-C  
 Endurance Time 4.5h



**Anti-Glare Design**  
 Eye protection

**Stretch Sheet Available**  
 Make beam angle bigger


**Adjustable Head**  
 Flexible lighting angle

**New UB01 series** White

Color Changeable LED Reading Light



Code UB05  
 Wattage 4W  
 CCT(K) 3000K/4000K/6000K  
 Lumens 320lm  
 Beam Angle 0°-70°  
 Dimmable Yes  
 Material ABS  
 Battery 3.7V 4000mAh  
 USB Charging Type-C  
 Endurance Time 4h  
 Detection Angle 120°



**2 Working Modes**  
 AUTO/HAND WAVE modes available

**Beam Angle Adjustable**  
 Customize the light beam you want

**Installation Back Sheet**  
 No pre-Installation required and easy to remove

**New UB05 series** White Black


3CCT Square Wall Light





# BATTERY LIGHT

**Code** UB02-30  
**Wattage** 1.5W  
**CCT(K)** 3000K-6000K  
**Lumens** 120lm  
**Beam Angle** 120°  
**Dimmable** Yes  
**Material** ABS+PC  
**Lenth** 30cm  
**Battery** 3.7V 1500mAh  
**USB Charging** Type-C  
**Endurance Time** 6h  
**Detection Angle** 120°



**Motion/Wave Sensor**  
Wide applications in various space

**Magnetic Adsorption**  
Easy to install and get recharged

**4 Working Modes**  
DAY/NIGHT/HAND WAVE/ ON TIME modes available

## UB02 series



Wireless Side-Emitting Under Cabinet Bar Light

UB02 series	New	Coming	Coming
<b>Code</b>	UB02-30	UB02-40	UB02-60
<b>Wattage</b>	1.5W	2W	3W
<b>Lumens</b>	120lm	160lm	240lm
<b>Battery</b>	3.7V 1500mAh	3.7V 2000mAh	3.7V 3000mAh
<b>Duration Time</b>	6h	6h	6h
<b>Lenth(L)</b>	30mm	40mm	60mm



# BATTERY LIGHT

**Code** UB06R  
**Wattage** 2W  
**CCT(K)** 3000K/4000K/6000K+RGB  
**Lumens** 160-180lm  
**Beam Angle** 45°/110°  
**Dimmable** Yes  
**Material** ABS  
**Diameter** 85mm  
**Battery** 3.7V 2000mAh  
**USB Charging** Type-C  
**Endurance Time** 6H



**Wireless Connectable**  
Convenient group control via remote control


**2 Beam Angles Available**  
Choose the one more suitable

**2 Modes Optional**  
Motion/ Handwave sensor activated

## New UB06 series




Wireless Connectable LED Cabinet Light

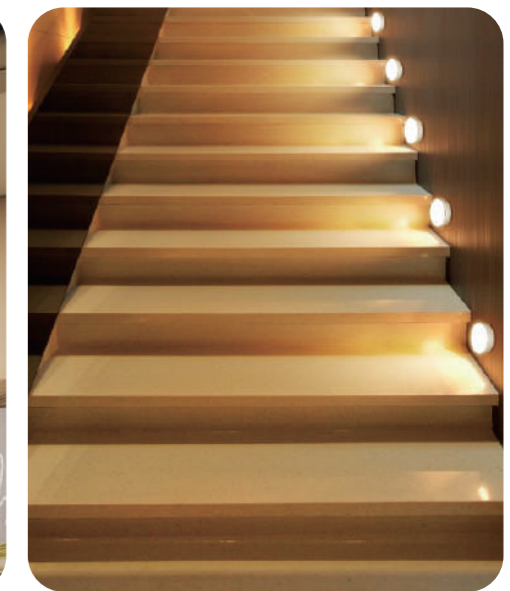


## UB | Wireless Surface-Emitting Under Cabinet Bar Light

### SPECIFICATIONS

Code	UB03-30	UB03-40	UB03-60
Wattage	1.5W	2W	3W
CCT(K)	3000-6500K		
Lumens	120lm	160lm	240lm
Dimmable	Yes		
Battery	3.7V 1500mAh	3.7V 2000mAh	3.7V 3000mAh
USB Charging	Type-C		
Charging Time	3 hours	4 hours	5 hours
Endurance Time	6 hours		
Working Mode	AUTO/OFF/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s		
Human Body Detection Distance	0-4m		
Hand Scan Detection Distance	<10cm		
Lenth(L)	30cm	40cm	60cm
Material	ABS+PC		

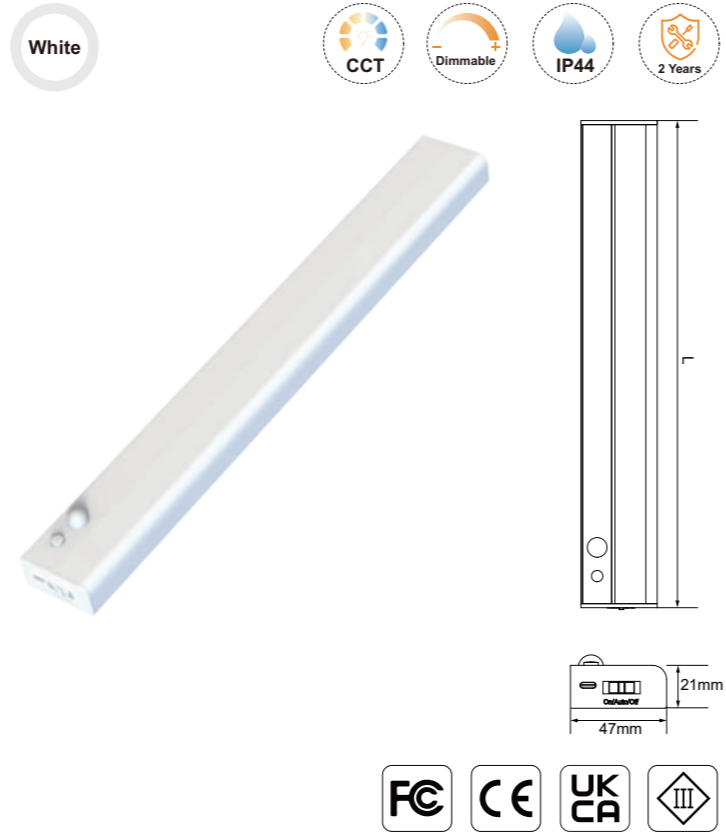

Code	OT-01A-4P3
Wattage	4W
CCT(K)	3000K/4000/6500K
Lumens	180lm
Beam Angle	30°
Dimmable	Yes
Material	ABS+PC
Height	9mm
Solar Panel	5.5VDC
Battery	3.7V1800mAh
USB Charging	Type-C
Endurance Time	2.5h
Detection Angle	120°



### Adjustable Solar Panel

Efficient solar powered & save energy



### Sensitive Motion Sensor

Sensitive Motion Sensor



### Adjustable Head

Illuminate specific items you need




# OT-01 series Black

30°/120° LED Solar Spike Light

## UB | Side-Emitting Connectable Under Cabinet Bar Light

### SPECIFICATIONS

Code	UB04-30	UB04-40	UB04-60
Wattage	5W	6.5W	10W
CCT(K)	3000K-6500K		
Lumens	400lm	520lm	800lm
Dimmable	Yes		
Input	220-240V~50/60Hz		
Output	24V DC		
Working Mode	AUTO/NIGHT/HAND WAVE/ON TIME		
Detection Angle	120°		
Sensor Duration Time	30s/60s/120s		
Human Body Detection Distance	0-4m		
Hand Scan Detection Distance	<10cm		
Lenth(L)	30cm	40cm	60cm
Material	ABS+PC		

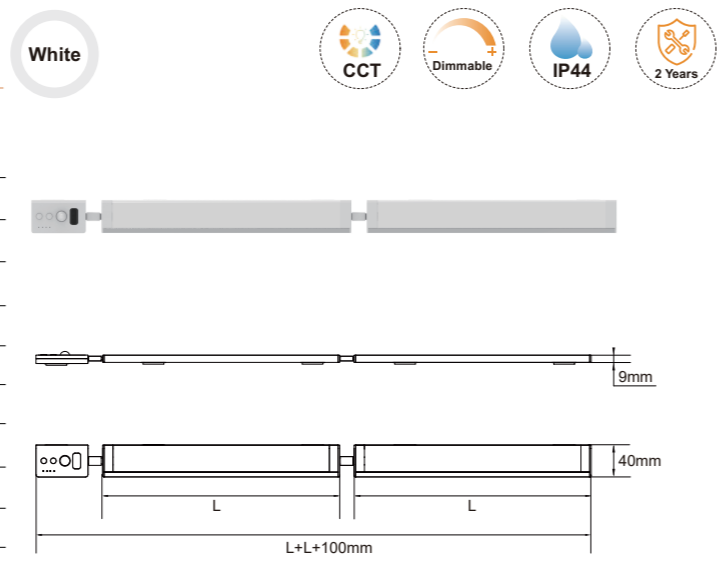

OT series						
Code	OT-01A-1D3	OT-01A-1R	OT-01A-4P3	OT-01B-1D3	OT-01B-1R	OT-01B-4P3
Wattage	1.2W	1.2W	4W	1.2W	1.2W	4W
Lumens	60-80lm	60-80lm	180lm	60-80lm	60-80lm	180lm
Illumination	240Lux/1m	240Lux/1m	750Lux/1m	240Lux/1m	240Lux/1m	750Lux
Beam Angle	30°	30°	30°	120°	120°	120°
Detection Angle	/	/	120°	/	/	120°
Endurance Time	8-10h	8-10h	2.5h	8-10h	8-10h	2.5h





## OT | Colour Adjustable LED Solar Security Light

### SPECIFICATIONS

Code	OT-04
Wattage	5W
CCT(K)	3000K-6500K
Lumens	400lm max
Dimmable	Yes
Beam Angle	100°
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Endurance Time	2 hours
Worknig Mode	AUTO/D2D/ON TIME
Detection Angle	120°
Sensor Duration Time	30s/60s/120s
Detection Distance	9m max
Material	ABS+PC

Black





## OT | Colour Adjustable LED Solar Security Light

### SPECIFICATIONS

Code	OT-05
Wattage	5W
CCT(K)	3000K/4000K/6500K
Lumens	400lm
Dimmable	No
Beam Angle	100°
Solar Panel	5.5VDC
Battery	3.7V 1800mAh
Charging Time	8-10 hours by solar energy
USB Charging	3.5 hours by Type-C
Endurance Time	2 hours
Detection Brightness	5-2000Lux
Detection Angle	120°
Sensor Duration Time	3secs-8mins
Detection Distance	16m max
Material	ABS+PC

Black



## UB02 Beginner Series

Easy operation & Cost effective

Motion sensor version



## SV25S Corner Lamp

Customize the way you like with high space utilization



## Outdoor Light NEO Series

with Brand New CommandX System

Make group control more convenient

The coming interconnectable product family